

NEW GEA MINIMAL IP65 - XXS C.C.

IP65 IK06 CE   

TIPOLOGIA / TYPOLOGY



Incasso | Recessed

POSIZIONE INSTALLATIVA | INSTALLATION POSITION

A soffitto | Ceiling mounting


AMBIENTE INSTALLATIVO | INSTALLATION LOCATION

Esterno | Outdoor

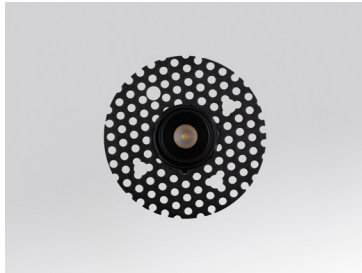

GEA MINIMAL IP65 - XXS

1W - 1,6W

 kg 0,03 28 mm (con cassaforma)
(with housing box)

NEW GEA MINIMAL IP65 - XXS C.C.

CARATTERISTICHE ELETTRICHE | ELECTRICAL FEATURES

POTENZA ASSORBITA POWER CONSUMPTION	1W - 1,6W
ALIMENTAZIONE POWER SUPPLY	C.C.
ALIMENTATORE POWER SUPPLY UNIT	1W - 350mA Non incluso Not included 1,6W - 500mA Non incluso Not included
COLLEGAMENTO CONNECTION	Serie Series

CARATTERISTICHE ILLUMINOTECNICHE | LIGHTING FEATURES

COLORE LED LED COLOUR	2200K, 2700K, 3000K, 4000K, Red, Green, Blue
INDICE RESA CROMATICA CRI CRI	>80 (2200K, 2700K, 3000K, 4000K)
BINNING	3 step MacAdam 3 MacAdam steps
OTTICHE OPTICS	18°, 35°, 57°
UGR	<19
FLUSSO REALE EMESSO - 3000K REAL OUTPUT FLUX	1W 85ml 35° - 1,6W 126ml 35°
DURATA MEDIA LED AVERAGE LED LIFE	50.000h L80 B10


CARATTERISTICHE MECCANICHE | MECHANICAL FEATURES

PESO WEIGHT	Kg 0,03
FINITURE FINISHES	Bianco txt , Grigio txt, Nero txt txt White, txt Grey, txt Black
INSTALLAZIONE INSTALLATION	A incasso su cartongesso con cassaforma a rasare (non inclusa), viti per fissaggio della cassaforma al cartongesso (non incluse) Recessed flush-mounting on plasterboard with housing box (not included), screws for fixing of the housing box to the plasterboard (not included)
MATERIALE MATERIAL	Corpo in alluminio anticorodal, dissipatore in alluminio anticorodal, lenti in PMMA o diffusore in PMMA opalino Anticorodal aluminium body, anticorodal aluminium heatsink, PMMA lens or Opal PMMA diffuser

CARATTERISTICHE GENERALI | GENERAL FEATURES

TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	-10°C +45°C
GRADO DI PROTEZIONE INGRESS PROTECTION	IP65
GRADO DI RESISTENZA IMPACT RESISTANCE	IK06
GLOW WIRE TEST GLOW WIRE TEST	960°C
TEMPERATURA SCHERMO SCREEN TEMPERATURE	40° @ Ta = 25°
CLASSE DI ISOLAMENTO APPLIANCE CLASS	III
CALPESTABILE WALKOVER	No
CARRABILE DRIVE OVER	No
SICUREZZA STANDARD STANDARD SAFETY	/
SICUREZZA FOTOBIOLOGICA PHOTOBIOLOGICAL SAFETY	GR1

ACCESSORI | ACCESSORIES

CODICE / CODE	CAG02
TIPOLOGIA / TYPOLOGY	Cassaforma Housing box  kg 0,025
MATERIALE / MATERIAL	Acciaio inox e alluminio Stainless steel and aluminium

