



NEW **STENO M 230Vac**

IP65 IK06 CE | **A > A+ > A++**

TIPOLOGIA / *TPOLOGY*



Incasso | *Recessed*

POSIZIONE INSTALLATIVA | *INSTALLATION POSITION*

A soffitto | *Ceiling mounting*

AMBIENTE INSTALLATIVO | *INSTALLATION LOCATION*

Esterno | *Outdoor*

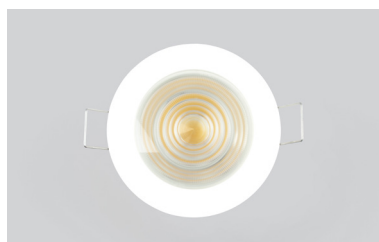

STENO M

19W

kg 0,98

116 mm

NEW **STENO M 230Vac**

CARATTERISTICHE ELETTRICHE | ELECTRICAL FEATURES

POTENZA ASSORBITA POWER CONSUMPTION	19W
ALIMENTAZIONE POWER SUPPLY	230Vac
FREQUENZA FREQUENCY	50/60 Hz
ALIMENTATORE POWER SUPPLY UNIT	Integrato (con elettronica 230Vac) <i>integrated</i> (with 230Vac Electronic)
COLLEGAMENTO CONNECTION	Tensione di rete <i>Mains voltage</i>

CARATTERISTICHE ILLUMINOTECNICHE | LIGHTING FEATURES

COLORE LED LED COLOUR	2700K, 3000K, 4000K
INDICE RESA CROMATICA CRI CRI	>80 (2700K, 3000K, 4000K)
BINNING	3 step MacAdam <i>3 MacAdam steps</i>
OTTICHE OPTICS	12°, 24°, 38°
FLUSSO REALE EMESSE - 3000K REAL OUTPUT FLUX	19W 1835lm 24°
DURATA MEDIA LED AVERAGE LED LIFE	50.000h L80 B10

CARATTERISTICHE MECCANICHE | MECHANICAL FEATURES

PESO WEIGHT	Kg 0,98
FINITURE FINISHES	Bianco txt , Grigio txt, Nero txt txt White, txt Grey, txt Black
INSTALLAZIONE INSTALLATION	A incasso su cartongesso o legno tramite molle (include), a incasso su muratura con cassaforma (non inclusa) e molle (include) <i>Recessed on plasterboard or wood with springs (included), on brickwork with housing box (not included) and springs (included)</i>
MATERIALE MATERIAL	Corpo e ghiera in alluminio anticorrosione, dissipatore in alluminio, vetro di chiusura <i>Anticorrosion aluminium body and trim, aluminium heatsink, closing glass</i>


CARATTERISTICHE GENERALI | GENERAL FEATURES

TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	-10°C +45°C
GRADO DI PROTEZIONE INGRESS PROTECTION	IP65
GRADO DI RESISTENZA IMPACT RESISTANCE	IK06
GLOW WIRE TEST GLOW WIRE TEST	960°C
TEMPERATURA MASSIMA APPARECCHIO MAX. TEMPERATURE OF FIXTURE	40° @ Ta = 25°
CLASSE DI ISOLAMENTO APPLIANCE CLASS	I
CALPESTABILE WALKOVER	No
CARRABILE DRIVE OVER	No
SICUREZZA STANDARD STANDARD SAFETY	/
SICUREZZA FOTOBIOLOGICA PHOTOBIOLOGICAL SAFETY	GR1

LLD

NEW STENO M 230Vac

ACCESSORI | ACCESSORIES

CODICE / CODE	CMSI25
TIPOLOGIA / TYPOLOGY	Cassaforma Housing box  kg 2,20
MATERIALE / MATERIAL	Acciaio inox e alluminio Stainless steel and aluminium

